


Technical notes

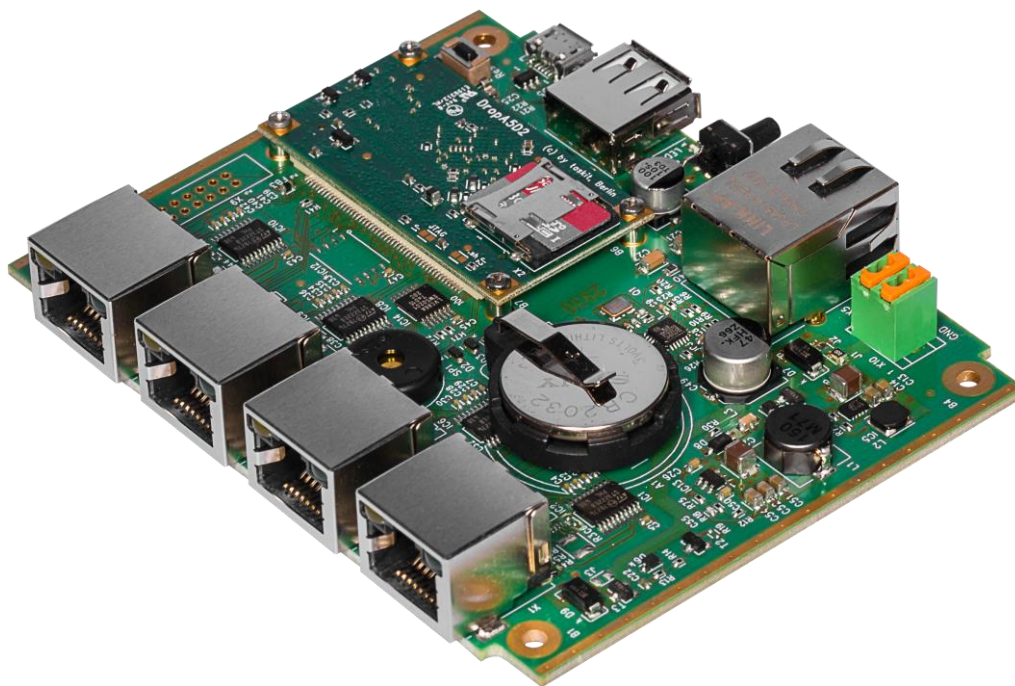

**NanosA5D2 – with RS232
Version 1.0 EN**

NanosA5D2: Version 1.0 EN

Copyright © 2023 taskit GmbH

taskit GmbH

Groß-Berliner Damm 37

12487 Berlin

Phone: +49 (0) 30 611 295 – 0

Fax: +49 (0) 30 611 295 – 10

www.taskit.de

All rights to this documentation and the product described herein remain with

taskit GmbH

Care has been taken in the preparation of this documentation. Nevertheless, errors cannot be completely excluded, so that neither the above-mentioned company nor the distributor assume any legal responsibility or any liability for incorrect information, resulting malfunctions or their consequences. Names of goods, brands and companies are used without guarantee of free usability. No part of it may be reproduced, processed, duplicated or distributed in any form without their written permission.

Copyright © taskit GmbH, Berlin.

Multi-Port RS232/RS422 Controller with Linux

Processor: Atmel SAMA5D22 (ARM Cortex-A5 Core) with 500 MHz
MicroSD-Card Slot
NAND-Flash max. 512MB (optional)
NOR-Flash max. 64MB (1MB standard)
Beeper
Backup battery (for real time clock)
Front side control button, e.g. for "Wake-Up", or application specific

Linux on MicroSD-Card

Board dimensions: 100mm x 80mm
Components over board: 14mm

Supply voltage: 6..28V, via connector Phoenix FK-MPT or Passiv-PoE (Power-over-Ethernet)

Interfaces:

20pin expansion port (2x10 contacts, 2mm pitch, for female or male connector), with SPI, I²C, comparator, "Tamper-Detection"-Pins.

Ethernet 100 Mbit/s

USB 2.0 (Host + Device)

Serial interfaces:

8x RS232

Or alternatively:

4x RS422 full-duplex

Or alternatively:

4x RS485 half-duplex

Connector: RJ45 (space saving compared to DSUB-9)

Assignment of the RJ45- sockets for the different assembly variants:

	RS232	RS422	RS485
1:	TXD1	TXD-	Data-
2:	TXD2/RTS	TXD+	Data+
3:	RXD1	RXD+	-
4:	24V	24V	24V
5:	24V	24V	24V
6:	RXD2/CTS	RXD-	-
7:	GND	GND	GND
8:	GND	GND	GND