




GPS-Antenna
SMA Receptacle

3x Automotive
Ethernet 100MBit/s
Molex Mini-50
Header

USB 2.0 480MBit/s
Host and Device

Ethernet
100Base-T

Vin = 8..28V
Terminal Block
3.5mm
e.g. Wago Picomax

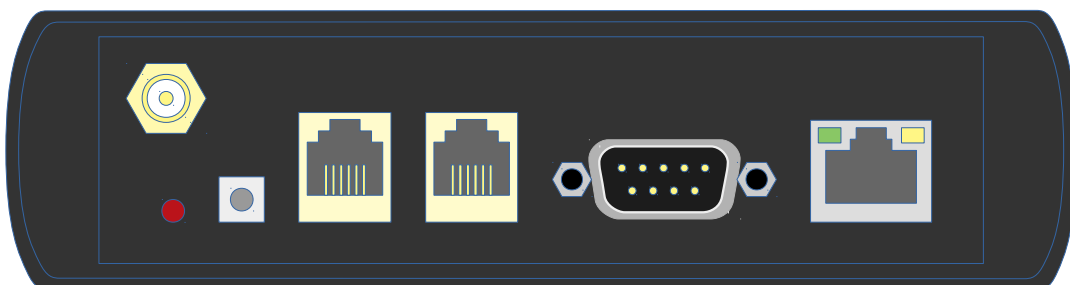

LTE-Antenna
SMA Receptacle

LVTTTL I/Os: UART,
I²C, SPI, GPIO
2x RJ12

RS485 3MBit/s
Field Bus

Status LED Push-Button, for
arbitrary use

2x CAN-Bus
DSUB-9 Header